

Visible Light Facial Recognition Terminal

FacePro15



Features

- 7-inch touch LCD screen
- Visible Light Facial Recognition
- Anti-spoofing algorithm against print attack (laser, color and B/W photos), videos attack and 3D mask attack
- IP65 ingress protection rating
- Communication mode: TCP/IP, WIFI Receiver (802.11b/g 1T1R WLAN, 20MHz and 40MHz bandwidth transmission)
- Optional facial recognition of multiple people at once (up to 4 people)



Face
Verification



Facial Recognition
for Multiple people



Built-in
WiFi



New Height of
Anti-Spoofing



Proactive Facial
Recognition




Wide Pose Angle
Acceptance



Touchless for
Better Hygiene

Working Application

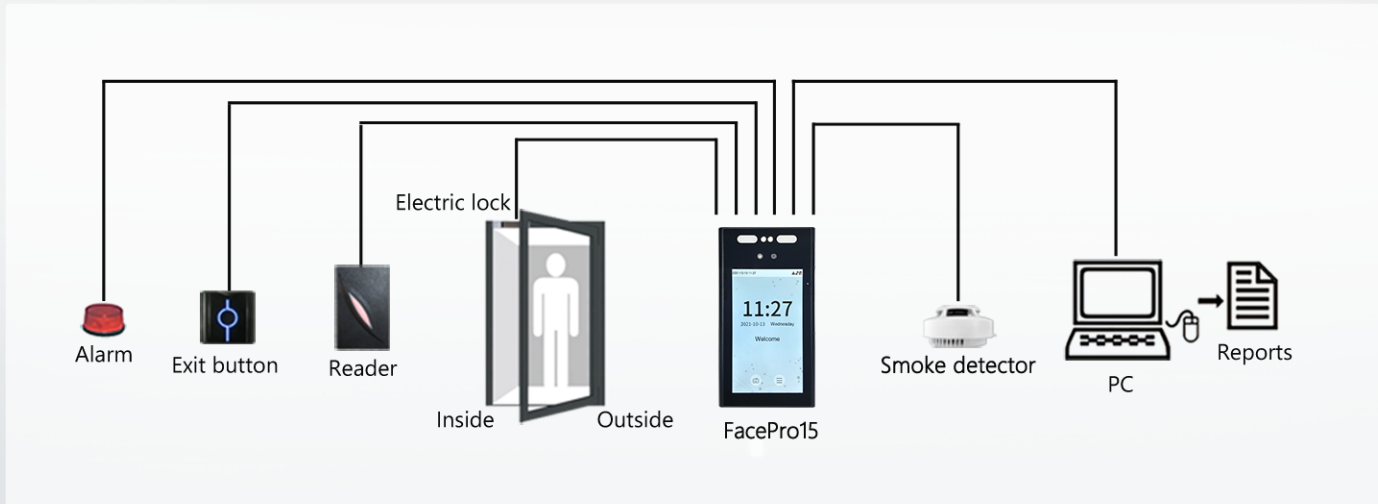

Specification

Display	7-inch Touch Screen
User Capacity	30,000
Face Capacity	30,000
Transaction	200,000
Operation System	Linux
Standard Function	ADMS, T9 Input, DST, Camera, 9-digit User ID, Access Levels, Groups, Holidays, Anti-passback, Record Query, Tamper Switch Alarm, Multiple Verification Methods
Hardware	Quad-core ARM Cortex-A7@ 1.2GHz, 1 GB RAM/ 8GB Flash, 2MP WDR Low Light Camera, Adjustable LED Light Brightness
Communication	TCP/IP, WIFI Receiver (802.11b/g 1T1R WLAN, 20MHz and 40MHz bandwidth transmission)
Access Control Interface	3rd Party Electric Lock, Door Sensor, Exit Button, Alarm output, Auxiliary Input
Facial Recognition Speed	≤ 1 s
Biometrics Algorithm	LiveFace V5.9
AC Adapter	DC 12V 3A
Working Humidity	0% to 90%
Working Temperature	-20°C to 45°C
Dimensions (W*H*D)	120 * 225 * 30 (mm)
Supported Software	UTime Master

Structure & Connection

